

TL-200

Deployable portable lighting in one bespoke robust package.

PORTABLE TRIPOD LIGHT



LIGHTER, BRIGHTER, FASTER DEPLOYMENT

Unfolding or folding the TL-200 takes just two steps, in under 10 seconds.




Secure the lamp at any height with the buckle.



One key to release tripod.



Optional ground pegs are available to secure the lighthouse, providing wind and vibration resistance.

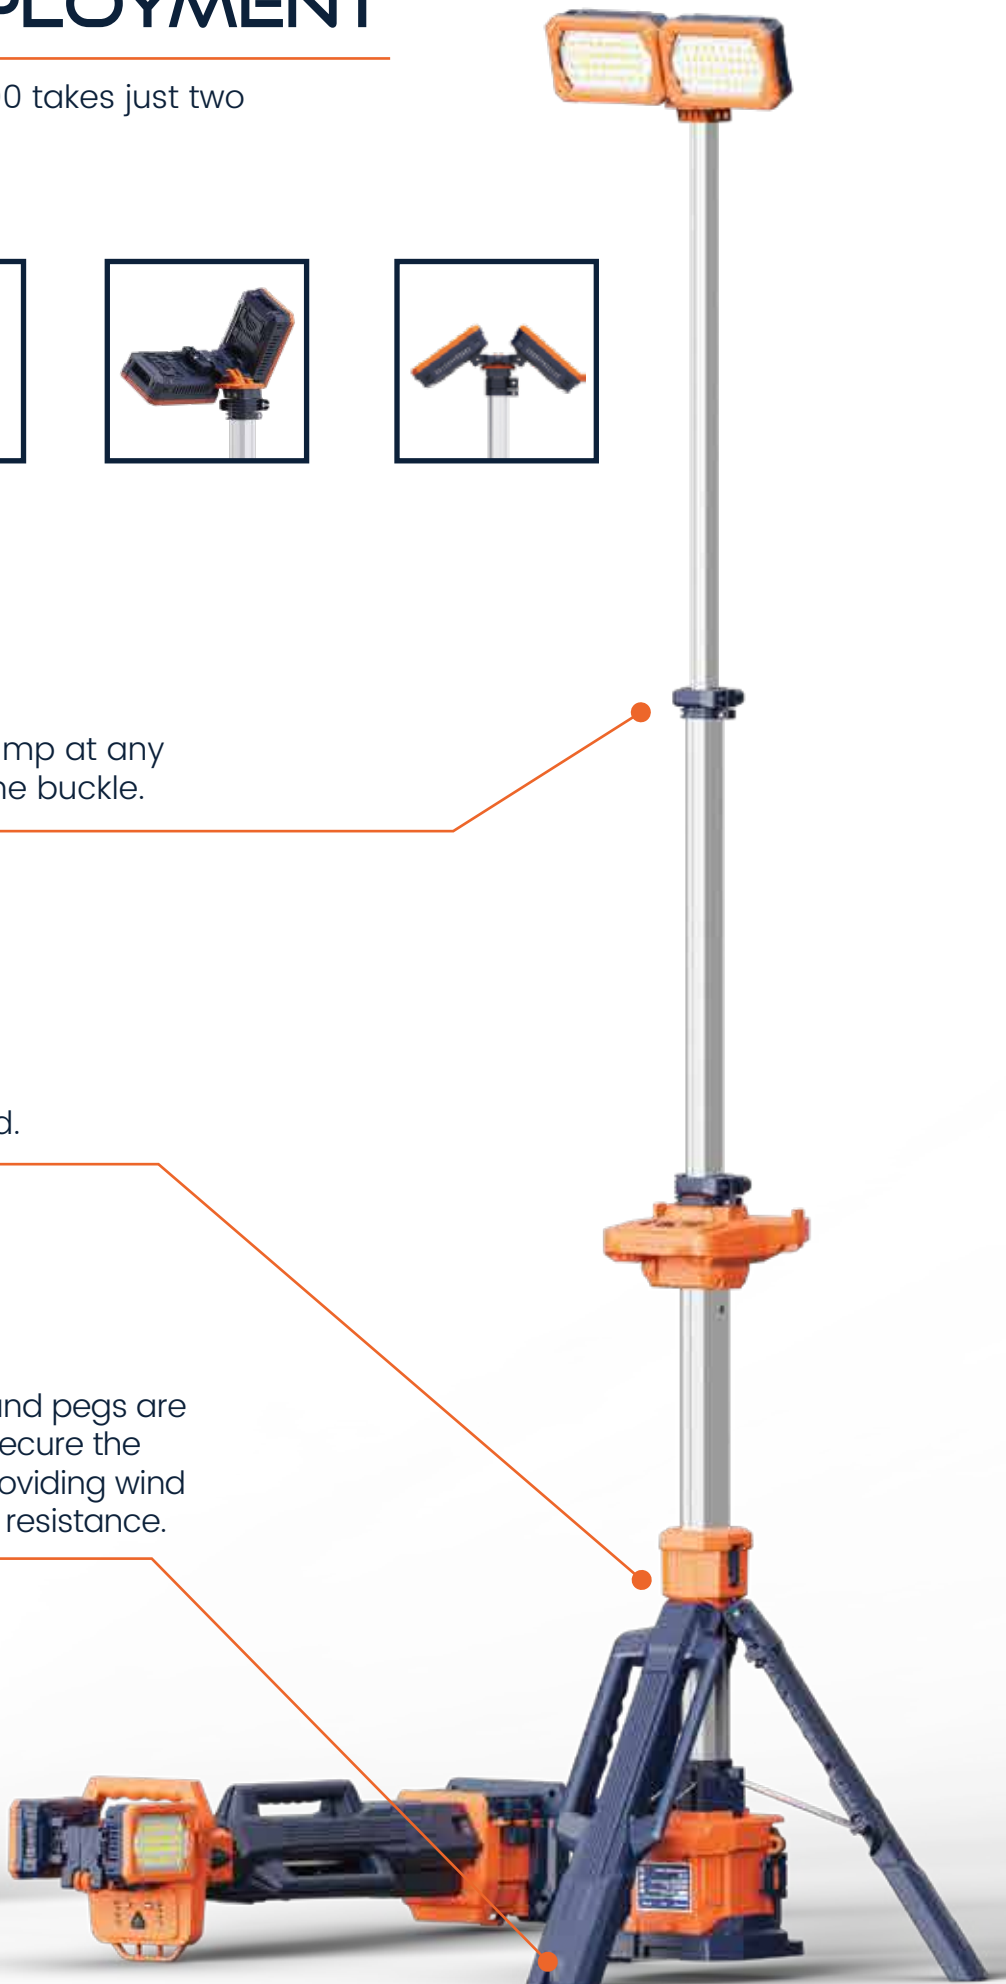

HUMANIZED DESIGN HIDDEN IN THE DETAILS

1

USB Output

Dual rainproof USB outputs for charging two devices at once, rain or shine.



2

Phone Stand



Continue working while charging, the hook here can serve as a phone stand.



3

Stepless Dimming

Plug the driver into the rainproof port to unlock maximum brightness and stepless dimming.

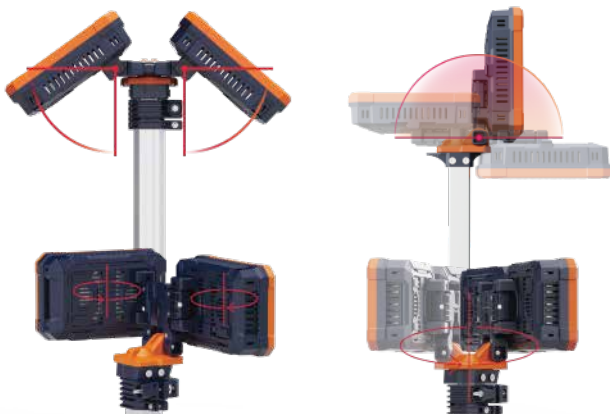

INCREASE PRODUCTIVITY & BRIGHTEN THE WORKPLACE

SINGLE HEAD AND DUAL-HEAD VERSION




Dual-head

| | | |
|---------------------|---------------------------------|---------|
| AC | 0-12,000LM Stepless Dimmable | |
| Battery (4 Mode) | Turbo | 6,000LM |
| | Standard | 3,500LM |
| | Balanced | 2,200LM |
| | Eco | 600LM |

Single Head

| | | |
|---------------------|----------|---------|
| Battery (4 Mode) | Turbo | 4,000LM |
| | Standard | 2,500LM |
| | Balanced | 1,500LM |
| | Eco | 450LM |

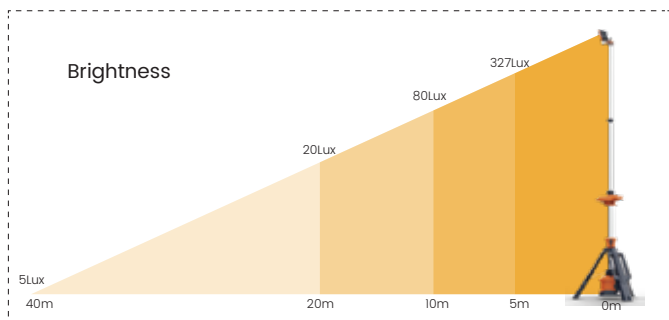

* Brightness represents the center point illuminance value of the lighting direction.

AC Powered
Up To **12,000** LM

Battery-powered
Up To **6,000** LM

SPECIFICATIONS

TL-200 Dual head


| | |
|--------------|---------------------------------------|
| Hight | 1m~2.3m |
| Weight | 6.3Kg (Fitting only) |
| Power Supply | D24 series battery pack / AC 100-277V |
| Lumens | 0 - 12,000Lm |
| Run Times | >8 hours (Standard mode, D24-100) |
| IP Grade | IP66 |
| Output(USB) | 5V 2A (2 Dock) |

TL-200 Single head

| | |
|--------------|-----------------------------------|
| Hight | 1m~2.3m |
| Weight | 5.9Kg (Fitting only) |
| Power Supply | D24 series battery pack |
| Lumens | 0 - 4,000Lm |
| Run Times | >8 hours (Standard mode, D24-100) |
| IP Grade | IP66 |
| Output(USB) | 5V 2A (2 Dock) |

Package

| Model | TL-200 Single head | TL-200 Dual head |
|------------------------|--------------------|------------------|
| Size of Carton | 109x26x33cm | 109x26x33cm |
| Gross Weight of Carton | 7.5KG±5% | 8.0KG±5% |
| PCS/Carton | 1 | 1 |

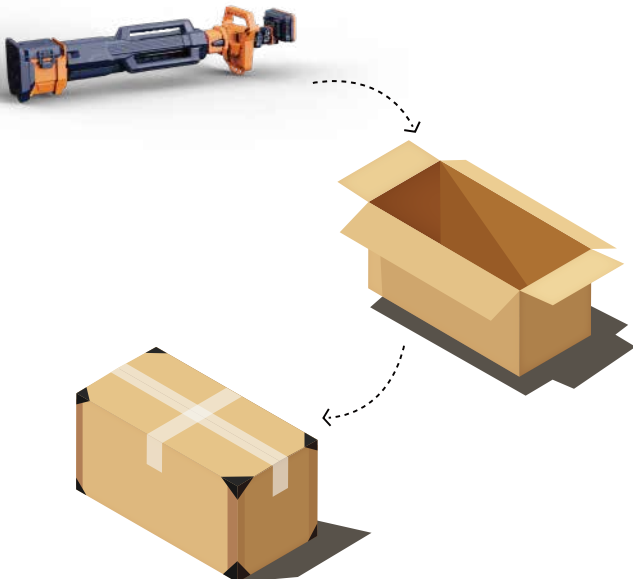

Size (mm)

